

Friden 130 Electronic Calculator



Instruction Manual

Price \$2.00

Published by



Friden, Inc.
Educational Center
31 Prince Street
Rochester, New York 14607

OPERATING INSTRUCTIONS FOR

Friden* 130 Electronic Calculator

Copyright 1964 by Friden, Inc.

*A Trademark of FRIDEN, INC.

FOREWORD

Operating the Friden Electronic Calculator 130 is like stepping into a new world of computing power for the desk calculator user. Through the magic of electronics, the features of storage capacity, flexibility, speed, silence, and decimal control are advanced to a level never before attained.

Designed to meet the styling requirements of modern business, the Friden 130 is a pleasant complement to any office decor. The complete operating silence of this machine eliminates disturbance of office personnel and promotes efficiency.

This machine is a solid-state device. These non-moving components are the secret to high-speed calculation. Input amounts and results of operation are visible instantly on the face of a cathode ray tube after the entry or function key is operated. Intermediate results are automatically retained in the upper registers. Also, an amount or result may be stored for further use in a memory unit.

A feather-touch eleven-key keyboard provides the means for numerical input. Function keys placed adjacent to this section are arranged for operator convenience and ease of operation.

Accuracy in decimal point control is insured by a fixed point system, around which all input amounts and results are automatically aligned. No other programming is necessary. The decimal point location can be manually selected for five different operating situations according to the requirements of the work at hand.

The 130 Electronic Calculator is able to handle a wide range of business and scientific applications in a logical and direct manner. The high degree of flexibility permitted in approaching problems makes this machine highly adaptable to arithmetic calculations of great variety.

TABLE OF CONTENTS

BASIC OPERATIONS

Register Display	1	Interest Rate on Installment Loans	19
Keyboard	2	Equal Monthly Payments	20
Operating Controls	3	Installment Payments on Mortgages	21
Addition/Subtraction	5		
Multiplication		MISCELLANEOUS APPLICATIONS	
Without Decimals	6	Probability	22
With Decimals	6	Actuarial Problem	23
Accumulation of Products		Probability—Life Insurance	24
Positive	6	Geometric Series	25
Negative	6	Standard Deviation	26
Chain Multiplication	6		
Division		ENGINEERING APPLICATIONS	
Without Decimals	7	Volume of a Sphere	27
With Decimals	7	Conversion of Denominate Numbers	28
Addition of Quotients	7	Area of a Sector	29
Addition/Subtraction of Quotients	7	Interpolation	30
Squaring a Number		Evaluating an Integral	31
Without Decimals	8	Evaluating a Polynomial	
Accumulative Squaring	8	Method #1	32
Negative Squaring	8	Method #2	33
Calculating Algebraically	9	Determinants	34
Sequential Operations	10	Cosine Law	36
The Memory Unit	11	Square Root	38
Raising to a Power	12	Cube Root	40
Accumulation of Products/Multipliers	13	Overcapacity Problems	42
Problems Involving Two Constants	14	Double Precision Multiplication	43
		Index	45

BUSINESS APPLICATIONS

Invoicing	15
Individual/Accumulated Percentages	16
Percentage Problems	17
Simple and Compound Interest	18

CHARTS AND TABLES

1941 Commissioners Standard	
Ordinary Mortality Table	24
Tangents and Cotangents	30
Cube Root Table	40



Friden 130 Electronic Calculator


REGISTER DISPLAY

The Friden 130 Electronic Calculator employs a new concept in computation. Commonly referred to as the "stacking" principle, it permits automatic storage of intermediate answers for later usage, according to the requirements of the formula being solved. Four 13-digit registers are arranged in a stack as follows:


1. **WORKING REGISTER (#1).** The bottom register is known as the Working Register. All entries and answers appear in it. All numbers enter the Display through this register and are displaced upwards as subsequent entries are made.
2. **REGISTER #2.** One number of an arithmetic

operation appears in this register, the other appears in the Working Register. When, however, the two terms appearing in these registers are combined arithmetically (added, subtracted, multiplied, or divided) the answer appears in the Working Register. Any values which were in the 3rd and 4th registers automatically shift down one position.

3. **REGISTERS #3 and #4.** These registers are used for storage of intermediate answers. This "stack" of four registers, then, fills and empties from the bottom on a "first in, last out" basis. If a fifth entry is made with all registers full, the contents of Register #4 "overflow" off the top and are lost.

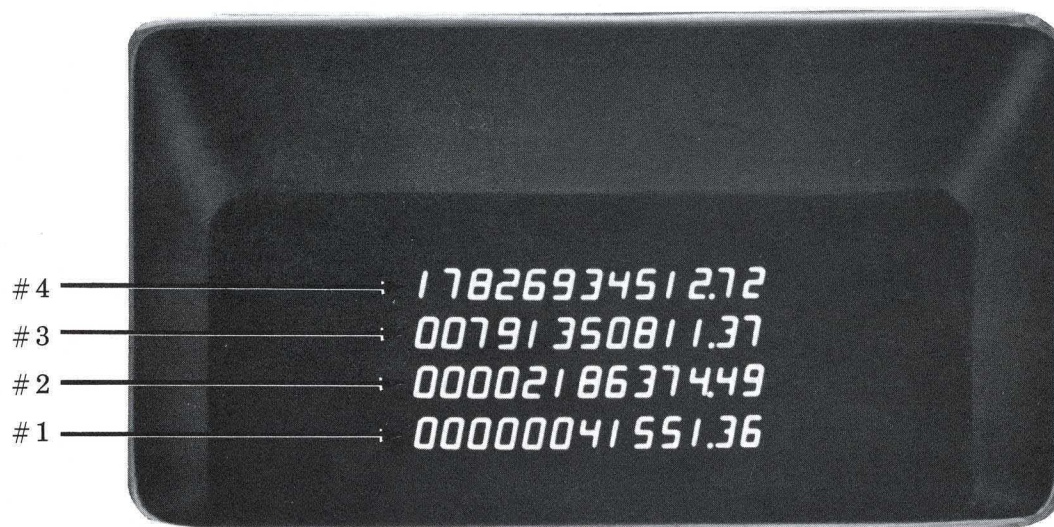

KEYBOARD AND OPERATING CONTROLS

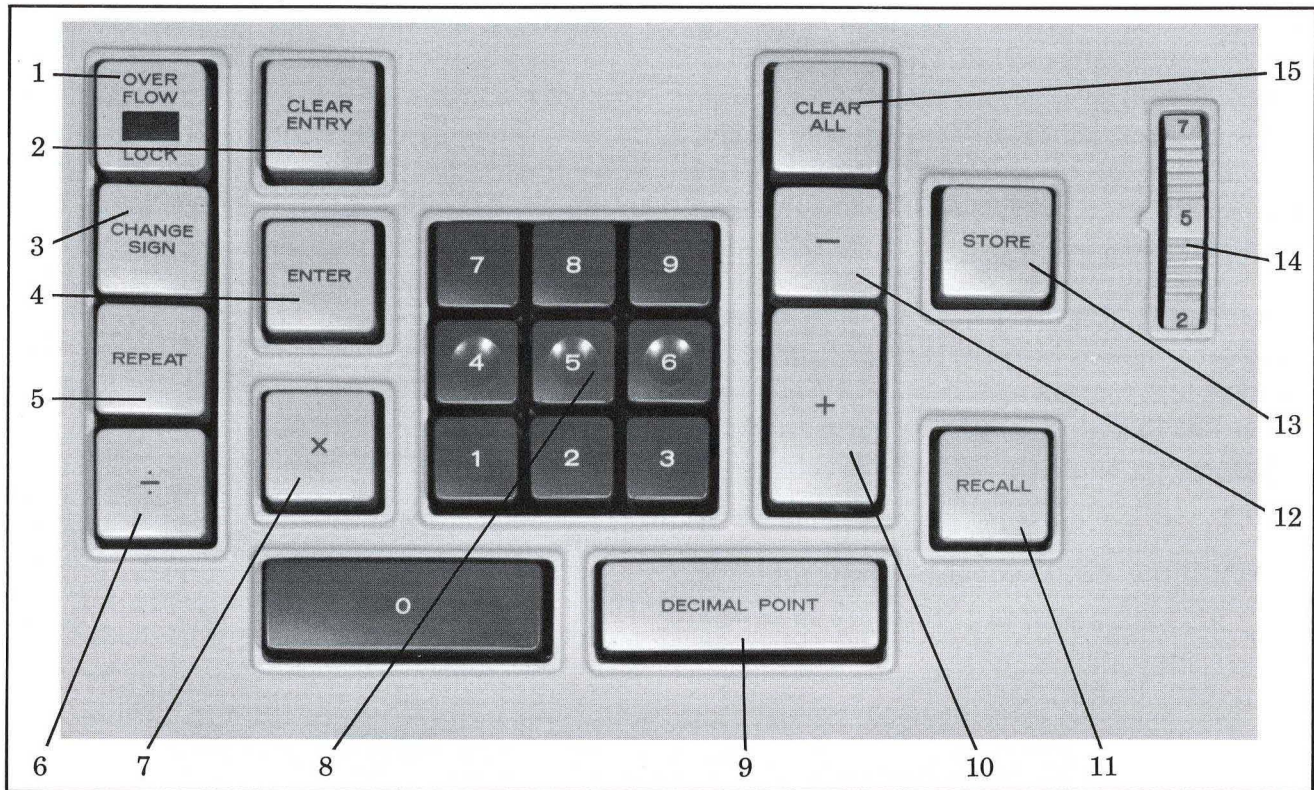

- 1. Over-Flow Lock
- 2. Clear Entry Key
- 3. Change Sign Key
- 4. Enter Key
- 5. Repeat Key
- 6. Division Key
- 7. Multiplication Key

- 8. Keyboard
- 9. Decimal Point Key
- 10. Plus Key
- 11. Recall Key
- 12. Minus Key
- 13. Store Key
- 14. Decimal Point Selector

15. Clear All

OPERATING CONTROLS

1. **OVER-FLOW LOCK KEY**—If a number, entered in Working Register # 1, is beyond the left of decimal capacity of the selected decimal point program, the OVER-FLOW LOCK signal lights up. For example, if the Decimal Point Selector is set on “7” it would mean that six digits only, can be indexed in the keyboard to the left of the decimal point. (13 digits capacity minus 7 decimal places equals 6 digits to the left of decimal.) If then 1,234,567.89 is indexed on the keyboard, the OVER-FLOW LOCK signal lights up upon depression of the ENTER key.

There is one other situation in which the OVER-FLOW LOCK signal lights up. That is, where an *answer* exceeds the number of digits to the left of the selected decimal point program. Once the over-flow signal light is on, all keys are locked to prevent further usage. Touching either the CLEAR ENTRY or CLEAR ALL keys will turn off the signal, unlock the keyboard, and simultaneously clear the affected registers. The keyboard may also be unlocked merely by touching the OVER-FLOW Lock key itself.

A *Decimal Interlock* is provided to prevent overloading digits to the right of the decimal point. Assuming a decimal selection of 2, then only two digits can be indexed after the decimal point key is depressed. The third and subsequent digits are automatically disregarded.

2. **CLEAR ENTRY**—A touch of the CLEAR ENTRY key will clear Working Register # 1. If a mistake is made in indexing a number, touch the CLEAR ENTRY key and proceed with the problem.

3. **CHANGE SIGN Key**—This key will permit calculations with algebraic sign changes. As an example take the problem $23.45 - (-.895)$. Use of the CHANGE SIGN key permits entry of .895

into the Working Register with the negative sign attached. The resultant answer will appear with the correct sign. See page 9 for other examples of this feature.


4. **ENTER KEY**—When a number is indexed in the keyboard that number appears immediately in Working Register # 1—but without the decimal point. A touch of the ENTER key, then, decimally aligns it. All function keys cause decimal alignment also. Therefore, when using such keys as CHANGE SIGN, REPEAT, and RECALL, it is not necessary to touch the ENTER key first.

5. **REPEAT Key**—The REPEAT key duplicates the contents of Register # 1 in Register # 2. The most common applications utilizing this feature are those involving squaring. But the REPEAT key may be used equally well for problems involving discounts, commissions, chain discounts and compound interest, to name a few. Squaring is a three step operation: (1) Index the number (2) Touch the REPEAT key, (3) Touch the Multiplication ($\times$) key.

6. **DIVISION Key**—A touch of the Divide key will cause the contents of Register # 2 to be divided by the contents of Register # 1. The answer will appear, decimally aligned in Register # 1. To divide, the procedure is as follows: (1) Index the dividend (2) Touch ENTER key (3) Index the divisor (4) Touch the Divide ($\div$) key.

If the Divide key is depressed with nothing in the Working Register, the Display goes blank and the machine will run indefinitely in the process of division. Touch the CLEAR ALL key to restore the Display.

7. **MULTIPLICATION Key**—A touch of the MULTIPLICATION key will cause the contents of Register # 1 to be multiplied by the contents of

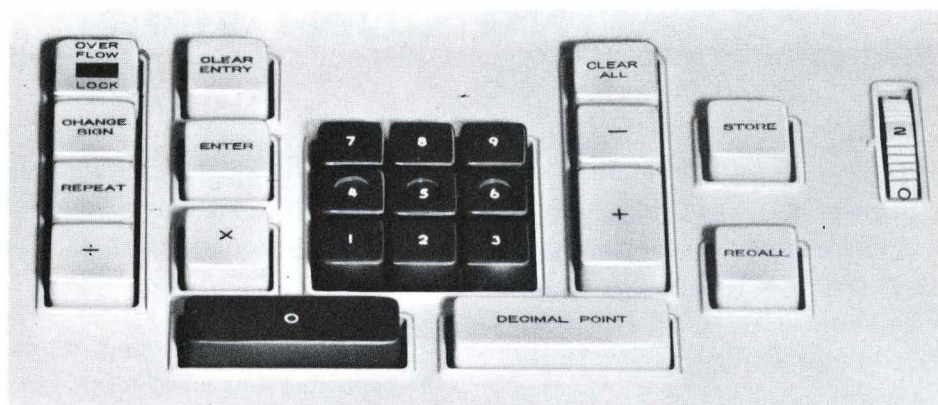

Register #2. The product will appear, decimally aligned, in Register #1. To multiply, the procedure is as follows: (1) Index the multiplicand (2) Touch ENTER key (3) Index the multiplier (4) Touch the Multiplication ($\times$) key.

8. **KEYBOARD**—All numbers are indexed on the “11-key” keyboard. The “11th” key is a decimal point key. As a number is indexed on the keyboard it appears in Register #1, digit by digit from the right.

9. **DECIMAL POINT Key**—The Decimal Point key must be depressed whenever a number with a decimal point in it is indexed in the keyboard. If the Decimal Point key is not used, the machine accepts the entry as a whole number. So 456.78 is indexed as 4-5-6-decimal point-7-8. And 678 is indexed as 6-7-8; the Decimal Point key need not be depressed in this case.

10. **PLUS Key**—A touch of the PLUS key will cause the contents of Register #1 to be added to the contents of Register #2. The answer will appear, decimally correct, in Register #1. To add, the procedure is as follows: (1) Index first number (2) Touch ENTER key (3) Index next number (4) Touch PLUS (+) key. Repeat steps #3 and 4 for subsequent numbers.

11. **RECALL Key**—The RECALL Key recalls any number stored in the Memory Unit. The

number stored may be repeatedly recalled to Register #1 for subsequent operations.

12. **MINUS Key**—A touch of the MINUS key will cause the contents in Register #1 to be subtracted from the contents of Register #2. The answer will appear, decimally correct in Register #1. To subtract, the procedure is as follows: (1) Index the first number (2) Touch ENTER key (3) Index the second number (4) Touch the MINUS ($-$) key.

13. **STORE Key**—A fifth register, not displayed, is provided for storage of a constant. A touch of the STORE key will transfer a number from Register #1 to the Memory Unit. If a number is already in storage, it replaces the old number with the new one. The stored number may be recalled as often as desired.

14. **DECIMAL POINT SELECTOR**—Automatic decimal control is maintained in all registers in keeping with the number of decimal places indicated on the decimal programs control wheel. There are five different decimal programs available. These are 0, 2, 5, 7, and 13. To eliminate needless shifting of the Decimal Point Selector, most problems in this manual are worked over a 5 place decimal program.

15. **CLEAR ALL Key**—A touch of the CLEAR ALL key clears all registers—including the Memory Unit.

ADDITION/SUBTRACTION

GENERAL INSTRUCTIONS

1. An ON/OFF switch is located under the lower right corner of the calculator. Push the lever back, in order to turn the machine on. The Display will appear in a few seconds.
2. Numbers are indexed in the 11-key keyboard just as they are written.
3. If an error is made in indexing a number, touch CLEAR ENTRY and begin over again.
4. The DECIMAL POINT key is used in all cases—except for whole numbers. For example, 28.13 is entered as 2-8-decimal-1-3; the number 68 is entered as 6-8; the decimal point is not required.
5. Since all entries are positive, a CHANGE SIGN key is provided to make these entries negative, when necessary. See example #5 below.
6. Clearing is unnecessary between problems.

PROBLEMS:


1. Addition without Decimals. $68 + 93 = 161$
2. Addition with Decimals. $28.13 + 17.24 = 45.37$
3. Subtraction with True Credit Balance. $97.24 - 118.43 = -21.19$
4. Addition and Subtraction. $15.243 + 17.819 - 23.147 = 9.915$
5. Subtracting Algebraically. $22.43 - (-32.46) = 54.89$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $68 + 93 = 161.00000$	68 93	Note: Move Decimal Point Selector to position 5 ENTER +
2. $28.13 + 17.24 = 45.37000$	28.13 17.24	ENTER +
3. $97.24 - 118.43 = 21.19000 -$	97.24 118.43	ENTER -
4. $15.243 + 17.819 = 33.06200$ $33.062 - 23.147 = 9.91500$	15.243 17.819 23.147	ENTER + -
5. $22.43 - (-32.46) = 54.89000$	22.43 32.46	ENTER CHANGE SIGN -

MULTIPLICATION

PROBLEMS:


1. Multiplication without Decimals..... $12 \times 24 = 288$
2. Multiplication with Decimals..... $24.02 \times .9401 = 22.5812$
3. Accumulation of Products
 - Positive..... $(39.445 \times 15.2) + (41 \times .6) = 624.164$
 - Negative..... $(3 \times .14) - (.007 \times 21) = .273$
4. Chain Multiplication..... $23.8 \times 16.92 \times .708 = 285.10876$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $12 \times 24 = 288.00000$	12 24	Note: Move Decimal Point Selector to position  5 ENTER X
2. $24.02 \times .9401 = 22.58120$	24.02 .9401	ENTER X
3. $39.445 \times 15.2 = 599.56400$ $599.564 + (41 \times .6) = 624.16400$	39.445 15.2 41 .6	ENTER X ENTER X +
$3 \times .14 = .42000$ $.42 - (.007 \times 21) = .27300$	3 .14 .007 21	ENTER X ENTER X -
4. $23.8 \times 16.92 = 402.69600$ $402.696 \times .708 = 285.10876$	23.8 16.92 .708	ENTER X X

DIVISION

PROBLEMS:

1. Division without Decimals..... $145 \div 12 = 12.08333$
2. Division with Decimals..... $4,962.184 \div 13.2 = 375.92303$
3. Addition of Quotients..... $\frac{624}{13} + \frac{78.2}{4.7} = 64.63829$
4. Addition/Subtraction of Quotients..... $\frac{45}{3} + \frac{34.26}{12.1} - \frac{17.76}{3.125} = 12.14820$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $145 \div 12 = 12.08333$	145 12	Note: Move Decimal Point Selector to position  ENTER ÷
2. $4,962.184 \div 13.2 = 375.92303$	4962.184 13.2	ENTER ÷
3. $\frac{624}{13} = 48.00000$ $+ \frac{78.2}{4.7} = 64.63829$	624 13 78.2 4.7	ENTER ÷ ENTER ÷ +
4. $\frac{45}{3} = 15.00000$ $+ \frac{34.26}{12.1} = 17.83140$ $- \frac{17.76}{3.125} = 12.14820$	45 3 34.26 12.1 17.76 3.125	ENTER ÷ ENTER ÷ + ENTER ÷ -

SQUARING A NUMBER

PROBLEMS:

1. Accumulative Squaring without

Decimals $25^2 + 12^2 = 769$

2. Accumulative Squaring with Decimals . . $78.23^2 + 26.35^2 = 6,814.25540$

3. Negative Squaring $34.126^2 - 18.29^2 = 830.05977$

4. Accumulative/Negative Squaring $18.124^2 + 9.18^2 - 15.23^2 - 3.1416^2 = 170.92922$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $25^2 = 625$ $+12^2 = 769$	25 12	Note: Move Decimal Point Selector to position  REPEAT  REPEAT  
2. $78.23^2 = 6119.9329$ $+26.35^2 = 6,814.25540$	78.23 26.35	REPEAT  REPEAT  
3. $34.126^2 = 1,164.58387$ $-18.29^2 = 830.05977$	34.126 18.29	REPEAT  REPEAT  
4. $18.124^2 = 328.47937$ $+ 9.18^2 = 412.75177$ $-15.23^2 = 180.79887$ $- 3.1416^2 = 170.92922$	18.124 9.18 15.23 3.1416	REPEAT  REPEAT   REPEAT   REPEAT  

CALCULATING ALGEBRAICALLY

PROBLEMS:

1. Minus $\div$ Minus $(-147.12) \div (-13.67) = 10.76225$
2. Plus $\times$ Minus $\times$ Minus $14.25 \times (-8.69) \times (-2.63) = 325.67947$
3. (Minus $\div$ Plus) $-$ (Plus $\div$ Minus) $[(-278.35) \div 9.035] - [843.7 \div (-28.001)] = -.6769$
4. Plus $\times$ Minus $\div$ Minus $[97.14 \times (-8.754)] \div (-2.345) = 362.62838$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $\frac{-147.12}{-13.67} = 10.76225$	147.12 13.67	Note: Move Decimal Point Selector to position  CHANGE SIGN CHANGE SIGN $\div$
2. $14.25 \times (-8.69) = -123.83250$ $\times (-2.63) = 325.67947$	14.25 8.69 2.63	ENTER CHANGE SIGN $\times$ CHANGE SIGN $\times$
3. $\frac{-278.35}{9.035} = -30.80796$ $-30.80796 - \left(\frac{843.7}{-28.001}\right) = -.67690$	278.35 9.035 843.7 28.001	CHANGE SIGN $\div$ ENTER CHANGE SIGN $\div$ $-$
4. $97.14 \times (-8.754) = -850.36356$ $\frac{-850.36356}{-2.345} = 362.62838$	97.14 8.754 2.345	ENTER CHANGE SIGN $\times$ CHANGE SIGN $\div$

SEQUENTIAL OPERATIONS

PROBLEMS:

$$1. (27.634 \times 8.13) \div 23.45 = 9.58057$$

$$2. \frac{(12.3 + 6.78) \times 9.84 \times 7.64^2}{14.2 - 6.07} = 1347.93714$$

$$3. \frac{\frac{164}{13.1} \times (1.4)^3}{\frac{8.9}{2} \times 4.7 \times .89} = 1.84547$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$1. 27.634 \times 8.13 = 224.66442$ $224.66442 \div 23.45 = 9.58057$	27.634 8.13 23.45	Note: Move Decimal Point Selector to position  ENTER × ÷
$2. 12.3 + 6.78 = 19.08$ $19.08 \times 9.84 = 187.74720$ $187.74720 \times (7.64)^2 = 10,958.72896$ Divide by $(14.2 - 6.07) = 1347.93714$	12.3 6.78 9.84 7.64 14.2 6.07	ENTER + × REPEAT × × ENTER - ÷
$3. 164 \div 13.1 = 12.51908$ Multiply by $(1.4)^3 = 34.35235$ $8.9 \div 2 = 4.45$ $4.45 \times 4.7 = 20.915$ $20.915 \times .89 = 18.61435$ $\frac{34.35235}{18.61435} = 1.84547$	164 13.1 1.4 8.9 2 4.7 $.89$	ENTER ÷ REPEAT REPEAT × × × ENTER ÷ × × ÷

THE MEMORY UNIT

GENERAL

To enter a number into the Memory Unit, index that number into the keyboard and touch the STORE key. To recall the number from storage, touch the RECALL key. The number entered into storage remains there for subsequent usage. It will continue to remain there until the CLEAR ALL key is touched, or another number is entered into storage.

2. CONSTANT DIVISOR

$$145 \div 12.13 = 11.95383$$

$$214 \div 12.13 = 17.64220$$

$$846 \div 12.13 = 69.74443$$

3. CONSTANT DIVIDEND

$$164 \div 18.92 = 8.66807$$

$$164 \div 24.16 = 6.78807$$

$$164 \div 2.013 = 81.47044$$

PROBLEMS:

1. CONSTANT MULTIPLIER

$$1.25 \times 21 = 26.25$$

$$1.25 \times 64 = 80.00$$

$$1.25 \times 182 = 227.50$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $1.25 \times 21 = 26.25$ $1.25 \times 64 = 80.00$ $1.25 \times 182 = 227.50$	1.25 21 64 182	Note: Move Decimal Point Selector to position 5 STORE RECALL * X RECALL X RECALL X
2. $145 \div 12.13 = 11.95383$ $214 \div 12.13 = 17.64220$ $846 \div 12.13 = 69.74443$	145 12.13 214 846	ENTER STORE RECALL ÷ RECALL ÷ RECALL ÷
3. $164 \div 18.92 = 8.66807$ $164 \div 24.16 = 6.78807$ $164 \div 2.013 = 81.47044$	164 18.92 24.16 2.013	STORE RECALL ÷ (Observe Answer) RECALL ÷ (Observe Answer) RECALL ÷ (Observe Answer)
*Depression of the RECALL key will cause decimal alignment of the indexed number and recall of the constant from memory in one operation.		

RAISING TO A POWER

PROBLEMS:

1. $8^5 = 32,768$
2. Same problem; alternate method
3. $(1.02)^{30} = 1.8113602$

Law of Exponents

A number may be easily raised to any power by employing the "Laws of Exponents."* The following laws are valid where m and n are any integers (positive, negative, or zero).

1. To multiply, add exponents.

$$a^m \times a^n = a^{(m+n)}$$

2. To divide, subtract exponents.

$$a^m \div a^n = a^{(m-n)}$$

3. To raise a power to a power, multiply exponents.

$$(a^m)^n = a^{mn}$$

4. The power of a product is the product of the powers.

$$(a \ b)^n = a^n b^n$$

5. A power of a quotient is the quotient of the powers.

$$\left(\frac{a}{b}\right)^n = \frac{a^n}{b^n}$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $8^5 = 32,768$ $8^2 = 64$ $8^3 = 512$ $8^4 = 4,096$ $8^5 = 32,768$	8	Note: Move Decimal Point Selector to position 7 REPEAT STORE RECALL × RECALL × " " " "
2. $8^2 = 64$ $8^4 = 4,096$ $8^5 = 32,768$	8	REPEAT REPEAT × REPEAT × ×
3. $(1.02)^2 = 1.0404$ $(1.02)^4 = 1.0824321$ $(1.02)^8 = 1.1716592$ $(1.02)^{16} = 1.3727852$ $(1.02)^{32} = 1.8845392$ $(1.02)^{32} \div (1.02)^2 = (1.02)^{30} = 1.8113602$	1.02	REPEAT × STORE RECALL REPEAT × " " " " " " RECALL ÷
*From G. James and R. C. James, Ed., MATHEMATICS DICTIONARY. Copyright 1949, 1959, D. Van Nostrand Co., Inc., Princeton, New Jersey.		

ACCUMULATION OF PRODUCTS/MULTIPLIERS

PROBLEMS:

$$\begin{array}{r} 1. \quad 64 \times 44 = 2816 \\ \quad 27 \times 56 = 1512 \\ \quad 38 \times 65 = 2470 \\ \hline 129 \qquad 6798 \end{array}$$

$$\begin{array}{r} 2. \quad X \qquad X^2 \\ \quad 14 \qquad 196 \\ \quad 15 \qquad 225 \\ \quad 16 \qquad 256 \\ \quad 17 \qquad 289 \\ \quad 18 \qquad 324 \\ \hline 80 \qquad 1290 \end{array}$$

$$\begin{aligned} \text{FIND: } \Sigma X &= 80 \\ \Sigma X^2 &= 1290 \end{aligned}$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $64 \times 44 = 2816$ $27 \times 56 = 1512$ $38 \times 65 = 6798$ The sum of the products (6798) appears in Register #1. The sum of the multipliers (129) appears in Register #2.	64 44 27 56 38 65	Note: Move Decimal Point Selector to position 5 REPEAT × STORE REPEAT × RECALL + STORE + REPEAT × RECALL + STORE + RECALL
2. $14^2 = 196$ $+ 15^2 = 421$ $+ 16^2 = 677$ $+ 17^2 = 966$ $+ 18^2 = 1290$ Read ΣX (80) in Register #2 Read ΣX^2 (1290) in Register #1	14 15 16 17 18	REPEAT REPEAT × STORE REPEAT REPEAT × RECALL + STORE + Same as step #2 Same as step #2 Same as step #2 RECALL

PROBLEMS INVOLVING TWO CONSTANTS

PROBLEMS:


$$1. (K_1 \times 0.95) + (K_2 \times 0.65) = 25.345$$

$$K_1 = 14.5$$

$$2. (K_1 \times 0.85) + (K_2 \times 0.55) = 22.115$$

$$K_2 = 17.8$$

$$3. (K_1 \times .78) + (K_2 \times 0.56) = 21.278$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. Store K_1 Store K_2 $(14.5 \times 0.95) = 13.775$ $+ (17.8 \times 0.65) = 25.345$	14.5 17.8 .95 .65	 <i>Note: Move Decimal Point Selector to position 5</i> REPEAT * STORE × RECALL × +
2. Clear previous answer $(14.5 \times 0.85) = 12.325$ $+ (17.8 \times 0.55) = 22.115$	.85 .55	CLEAR ENTRY REPEAT × RECALL × +
3. Clear previous answer $(14.5 \times 0.78) = 11.31$ $+ (17.8 \times 0.56) = 21.278$	.78 .56	CLEAR ENTRY REPEAT × RECALL × +
*The REPEAT key causes duplication of the contents of Working Register #1 in Register #2. The lower value may be used for a first operation. The upper value will be carried for subsequent usage.		

INVOICING

PROBLEM:

14 lbs. @ \$.56 lb.	= \$ 7.84
23 lbs. @ .57 lb.	= 13.11
40 ft. @ .62 ft.	= <u>24.80</u>
Sub Total	45.75
Add: 3% Sales Tax	<u>1.37</u>
Total	\$47.12


SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$(14 \times .56) = 7.84$ $+ (23 \times .57) = 20.95$ $+ (40 \times .62) = 45.75$ $(45.75 \times .03) + 45.75 = 47.12$	14 .56 23 .57 40 .62 .03	Note: Move Decimal Point Selector to position  ENTER × ENTER × + ENTER × + REPEAT × +
NOTE: If the problem had called for a 3% discount instead of a 3% sales tax, the final step would be to touch the Minus key instead of the Plus key.		

INDIVIDUAL/ACCUMULATED PERCENTAGES

PROBLEM:

<u>DEPT.</u>	<u>SALES</u>	<u>%</u>
A	\$ 6845	19.27
B	15322	43.13
C	(5537)	(15.59)
D	6431	18.10
E	16275	45.82
F	(1548)	(4.35)*
G	(2265)	(6.38)
	<u>35523</u>	<u>100.00</u>

*Adjusted for .01

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
		Note: Move Decimal Point Selector to position  STORE RECALL  “ “  “ “  “ “  “ “ “ “ • “  “ “ “
$6845 \div 35523 = .19269^{**}$ $15322 \div \text{“} = .43132$ $(5537) \div \text{“} = .15587$ $6431 \div \text{“} = .18103$ $16275 \div \text{“} = .45815$ $(1548) \div \text{“} = .04357$ $(2265) \div \text{“} = .06376$	35523 6845 15322 5537 6431 16275 1548 2265	
**NOTE: To convert from a decimal to a percent, it is necessary to multiply mentally by 100.		

PERCENTAGE PROBLEMS

PROBLEMS:

1. What % of \$345.65 is \$78.25? Answer: 22.638%

2. Increase or Decrease and Percent.

<u>Last year</u>	<u>This year</u>	<u>Change</u>	<u>% Change</u>
6375.85	7894.65	+1518.80	+23.82%
8765.45	3975.42	-4790.03	-54.65%

3. Percent Mark-up on Selling Price

<u>Sell</u>	<u>Cost</u>	<u>Gross Profit</u>	<u>Mark-up %</u>
\$942.38	\$656.75	\$285.63	30.31%
325.60	234.65	90.95	27.93%

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
NOTE: The number after the "of" in the problem is always the denominator. 1. $78.25 \div 345.65 = .22638 = 22.638\%$	78.25 345.65	Note: Move Decimal Point Selector to position 5 ENTER ÷
2. $7894.65 - 6375.85 = 1518.80$ $1580.80 \div 6375.85 = .23821 = 23.821\%$	7894.65 6375.85	ENTER STORE RECALL - RECALL ÷
$3975.42 - 8765.45 = -4790.03$ $-4790.03 \div 8765.45 = -.54646 = -54.646\%$	3975.42 8765.45	ENTER STORE RECALL - RECALL ÷
3. $942.38 - 656.75 = 285.63$ $285.63 \div 942.38 = .30309 = 30.309\%$	942.38 656.75	STORE RECALL - RECALL ÷
$325.60 - 234.65 = 90.95$ $90.95 \div 325.60 = .27933 = 27.933\%$	325.60 234.65	STORE RECALL - RECALL ÷

SIMPLE AND COMPOUND INTEREST

PROBLEMS:

1. Compute the ordinary simple interest on a loan of \$1700.00 at $5\frac{3}{4}\%$ for 92 days.

$$\begin{aligned}\text{Interest} &= (\text{Principal} \times \text{Rate} \times \text{Days}) / 360 \\ &= (\$1700.00 \times .0575 \times 92) \div 360 = \$24.98\end{aligned}$$

2. Find the compound amount of \$6,150.00 at 5% interest compounded quarterly for four years.

$$S = P (1 + i)^n = 6150.00 \left(1 + \frac{.05}{4}\right)^{16} = 6150 \times (1.0125)^{16}$$

$$S = \$7502.32$$

3. \$1000.00 @ 6% compounded yearly for 12 years.

$$1000.00 \times .06 \times (1.06)^{12} = \$2012.20$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $\\$1700.00 \times .0575 = \\$97.75$ $97.75 \times 92 = 8,993.00$ $8993.00 \div 360 = 24.98055$	1700 .0575 92 360	Note: Move Decimal Point Selector to position 5 ENTER × × ÷
2. Enter \$6150.00 for later use $(1.0125)^2 = 1.025\ 156\ 2$ $(1.0125)^4 = 1.050\ 945\ 2$ $(1.0125)^8 = 1.104\ 485\ 8$ $(1.0125)^{16} = 1.219\ 888\ 8$ $1.2198888 \times 6150.00 =$ $7502.3161200 = \\$7502.32$	6150 1.0125	Note: Move Decimal Point Selector to position 7 ENTER REPEAT “ “ “ “ “ “ ×
3. Enter \$1000.00 for later use $(1.06)^2 = 1.1236$ $(1.06)^4 = 1.2624769$ $(1.06)^8 = 1.5938479$ $(1.06)^4 \times (1.06)^8 = (1.06)^{12} = 2.0121961$ $(1.06)^{12} \times 1000.00 = 2012.1961000$	1000 1.06	ENTER REPEAT REPEAT REPEAT REPEAT × × × ×

INTEREST RATE ON INSTALLMENT LOANS

PROBLEM: A colored television set sells for \$720.00 cash. If a buyer agrees to pay \$240.00 cash and the balance in 10 equal monthly payments of \$53.50 each, what rate of interest is he being charged?

FORMULA:
$$R = \frac{72T}{3A(n + 1) + T(n - 1)}$$

$$= \frac{72 \times 55.00}{(3 \times 480.00 \times 11) + (55.00 \times 9)}$$

R = Interest Rate per annum

A = Amount of Loan

$$(\$720.00 - 240.00 = \$480.00)$$

T = Total charge $(10 \times 53.50 - 480.00 = \$55.00)$

n = number of periods (10)

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
		Note: Move Decimal Point Selector to position 5
$72T = 72 \times 55.00 = 3960$	72	ENTER
	55	×
$3A = 3 \times 480.00 = 1440$	3	ENTER
	480	×
$3A(n + 1) = 1440 \times 11 = 15840$	11	×
$+ T(n - 1) = +(55.00 \times 9) = 16,335$	55	ENTER
	9	× +
$\frac{72T}{3A(n + 1) + T(n - 1)} = .2424 = 24.24\%$		÷

CREDIT LOANS

DETERMINATION OF EQUAL MONTHLY PAYMENTS

PROBLEM: A loan of \$220.00 is to be repaid with interest at $2\frac{1}{2}\%$ per month for 12 months. Find the equal monthly payment.

$$\text{FORMULA: } R = P \frac{i}{1 - (1 + i)^{-n}} = P \frac{i}{1 - \frac{1}{(1 + i)^n}}$$

$$= (220.00) \frac{.025}{1 - \frac{1}{(1.025)^{12}}} = \$21.45$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$220.00 \times .025 = 5.50$ $(1.025)^2 = 1.05062$ $(1.025)^4 = 1.1038$ $(1.025)^8 = 1.21837$ $(1.025)^4 \times (1.025)^8 = (1.025)^{12} = 1.34483$ $1 - \frac{1}{(1.025)^{12}} = .25642$ Monthly Payment = $21.44918 = \$21.45$	220 .025 1.025 1	5 Note: Move Decimal Point Selector to position ENTER × REPEAT × REPEAT × REPEAT REPEAT × × STORE REPEAT RECALL ÷ - ÷

INSTALLMENT PAYMENTS ON MORTGAGES

PROBLEMS:

	<u>LOAN</u>	<u>RATE</u>	<u>MONTHLY PAYMENT</u>	<u>INTEREST</u>	<u>PAYMENT ON LOAN</u>	<u>BALANCE</u>
1.	\$3500.00	$5\frac{1}{2}\%$	\$45.00	\$16.04	\$28.96	\$3471.04
2.	\$2275.25	5%	27.50	9.48	18.02	2257.23

ANALYSIS:

Loan $\times$ Interest Rate per Annum = Interest

Monthly Payment $-$ Interest = Payment on Loan

Loan $-$ Payment on Loan = Balance of Loan

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. $3500.00 \times .055 = 192.50$ Interest = $192.50 \div 12 = 16.04166$ Payment = $16.04166 - 45.00 = 28.95834 -$ Balance = $3500.00 - 28.96 = 3471.04$	3500 .055 12 45	<i>Note: Move Decimal Point Selector to position 5</i> REPEAT $\times$ $\div$ $-$ $+$
2. $2275.25 \times .05 = 113.7625$ $113.7625 \div 12 = 9.48020$ $9.48020 - 27.50 = 18.01980 -$ $2275.25 - 18.02 = 2257.23$	2275.25 .05 12 27.5	REPEAT $\times$ $\div$ $-$ $+$

PROBABILITY

PROBLEM: What is the probability of drawing the Ace, King, Queen, Jack, and Ten of Hearts in any order in five successive draws from a bridge deck.

$$\begin{aligned}\text{ANALYSIS: P} &= \frac{5}{52} \times \frac{4}{51} \times \frac{3}{50} \times \frac{2}{49} \times \frac{1}{48} \\ &= \frac{120}{311,875,200} = \frac{1}{2,598,960}\end{aligned}$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$5 \times 4 = 20$	5	ENTER
$20 \times 3 = 60$	4	$\times$
$60 \times 2 = 120$	3	$\times$
$120 \times 5 = 600$	2	$\times$ STORE
$600 \times 52 = 31,200$	52	ENTER
$31,200 \times 51 = 1,591,200$	51	$\times$
$1,591,200 \times 50 = 79,560,000$	50	$\times$
$79,560,000 \times 49 = 3,908,440,000$	49	$\times$
$3,908,440,000 \times 48 = 187,605,120,000$	48	$\times$
$187,605,120,000 \div 120 = 1,563,376,000$		RECALL $\div$

Note: Move Decimal Point Selector to position 2

ACTUARIAL PROBLEM

PROBLEM: Find the value at age 18 of a temporary life annuity of \$1500.00 per year for three years.
Assume an interest rate of 2%.

FORMULA: $a_{\overline{18:3}|} = {}_1E_{18} + {}_2E_{18} + {}_3E_{18}$

$$a_{\overline{18:3}|} = (1500) \frac{953743* (.98039) + 951483 (.96117) + 949171 (.94232)}{955942}$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
		5
Store 1500 for use in step 6 below	1500	ENTER
$953743 \times .98039 = 935,040.09977$	953743	ENTER
	.98039	X
$+ (951483 \times .96117) = 1,849,577.01488$	951483	ENTER
	.96117	X +
$+ (949171 \times .94232) = 2,743,999.83160$	949171	ENTER
	.94232	X +
Divide by Denominator = 2.87046	955942	÷
Multiply by \$1500.00 = \$4305.69		X
For an annuity of \$1500 per period, the net single premium is \$4305.69.		

*From "Commissioners 1941 Standard Ordinary Mortality Table."

LIFE INSURANCE PROBABILITY

PROBLEM: What is the probability that a person aged 35 will die in 10 years?

FORMULA: The probability that a person aged x will die in n years is given by the formula:

$${}_nq_x = 1 - \frac{l_x + n}{l_x}$$

SOLUTION*: ${}_{10}q_{35} = 1 - \frac{l_{45}}{l_{35}} = 1 - \frac{852554}{906554} = \frac{54000}{906554}$

= .05957 (or roughly, the odds are 6 in 100)

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$1 - \frac{852554}{906554} = .05957$	1 852554 906554	Note: Move Decimal Point Selector to position 5 ENTER ENTER ÷ —

*NOTE: The table below is taken from the 1941 Commissioners Standard Ordinary Mortality Table and is the record of the number of deaths at different ages of a large number of persons.

Age <i>x</i>	Number Living <i>l_x</i>	Number of Deaths <i>d_x</i>	Yearly Probability of Dying <i>q_x</i>
35	906,554	4,161	0.00459
.	.	.	.
.	.	.	.
.	.	.	.
.	.	.	.
45	852,554	7,340	0.00861

GEOMETRIC SERIES

PROBLEM: Find the sum of 10 terms, beginning with the first, of the following geometric series:

$$\frac{15}{32}, \frac{15}{16}, \text{ etc.}$$

FORMULA: $s = \frac{a - ar^n}{1 - r}$

$a = \text{1st term} = \frac{15}{32}$

$r = \text{common ratio} = 2$

$n = \text{number of terms} = 10$

$s = \text{sum of the terms} = ?$

$$s = \frac{\frac{15}{32} - \left(\frac{15}{32} \times 2^{10}\right)}{1 - 2} = 479.53$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$\frac{15}{32} = .46875$ $2^2 = 4$ $2^4 = 16$ $2^8 = 256$ $2^{10} = 1024$ $\frac{15}{32} \times 2^{10} = .46875 \times 1024 = 480$ $\frac{15}{32} - \left(\frac{15}{32} \times 2^{10}\right) = 479.53125 -$ Divide by Minus 1 = 479.53125	15 32 2 1	 Note: Move Decimal Point Selector to position 5 ENTER $\div$ REPEAT REPEAT $\times$ REPEAT STORE REPEAT $\times$ REPEAT $\times$ RECALL $\times$ $\times$ $-$ CHANGE SIGN $\div$

STANDARD DEVIATION (Ungrouped Data)

PROBLEM:

X Values:

23
21
18
17
15
14
14
12
9
7
5
155

$$\Sigma X^2 = 2499$$

$$\Sigma X = 155$$

$$n = 11$$

$$\sigma = \sqrt{\frac{n(\Sigma X^2) - (\Sigma X)^2}{n^2}}$$

$$\sigma = \sqrt{\frac{(11 \times 2499) - (155)^2}{11^2}} = 5.35$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. Enter 1st X value; square it. 2. Enter 2nd X value; square it. 3. Enter 3rd and subsequent X values. Repeat Step # 2 (above) Read ΣX (155) in Register # 1. Touch RECALL. Now read ΣX^2 (2499) in Register # 1 and ΣX (155) in Register # 2.	23 21	Note: Move Decimal Point Selector to position 5 REPEAT REPEAT × STORE REPEAT REPEAT × RECALL + STORE + *
1. $n\Sigma X^2 = 27,489$ 2. $-(\Sigma X)^2 = 3,464$ 3. Divide by $n^2 = 28.62809$ 4. Use the Square Root Application on page 38 to extract the square root of 28.62809. $\sigma = 5.35$	11 155 11	× REPEAT × - REPEAT × ÷
*This operation causes ΣX^2 to be accumulated in the Memory Unit and ΣX to be accumulated in the Display.		

VOLUME OF A SPHERE

PROBLEM: Assume a sphere with a 7.26 inch radius. Find the volume.


FORMULA: $V = \frac{4}{3}\pi r^3$

$$V = \frac{4 \times 3.1416 \times (7.26)^3}{3} = 1602.87 \text{ cu. inches}$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$4 \times \pi = 12.56640$ $(7.26)^3 = 382.65717$ $4\pi r^3 = 4808.62306$ Divide by 3 = 1602.87435	4 3.1416 7.26 3	Note: Move Decimal Point Selector to position 5 ENTER × REPEAT REPEAT × × × ÷

CONVERSION OF DENOMINATE NUMBERS

PROBLEM: Divide the angle $14^{\circ} 22' 6''$ into four equal angles.

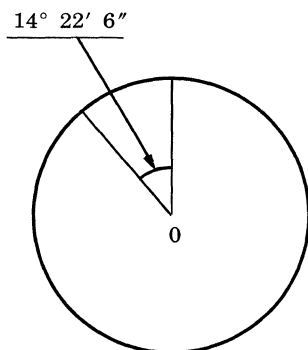

NOTE: The same procedure used for degrees, minutes and seconds could be applied equally well to hours, minutes and seconds; yards, feet, inches; drams, ounces, pounds, etc.


SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. <u>Convert $14^{\circ} 22' 6''$ to Seconds</u> $(14^{\circ} \times 3600) = 50,400$ $+ (22' \times 60) = 51,720$ Plus 6 seconds = 51,726	14 3600 22 60 6	<i>Note: Move Decimal Point Selector to position 5</i> ENTER × ENTER × + +
2. Divide by 4 = 12,931.5	4	÷
3. <u>Convert to Degrees, Minutes, Seconds</u> (A) $12,931.5 \div 3600 = 3.59208$ 3 Degrees (B) $(3.59208 - 3) \times 60 = 35.52480$ 35 Minutes (C) $(35.52480 - 35) \times 60 = 31.488$ 31 Seconds Therefore, the angle $14^{\circ} 35' 31''$ is divided into four equal angles of $3^{\circ} 35' 31''$ each.	3600 3 60 35 60	÷ - × - ×

AREA OF A SECTOR

PROBLEM: Given the sector AXBS, find the area.

Radius = AX = 94 feet

Angle X = $50^{\circ} 29' 35''$



FORMULA: $\left(\frac{\angle X^{\circ}}{360}\right) \pi r^2 = \frac{50^{\circ} 29' 35''}{360} \times 3.14159 \times (94)^2 = 3893.44 \text{ Sq. Ft.}$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. Convert $50^{\circ} 29' 35''$ to a decimal equivalent $\frac{29}{60} = .4833333$ $\frac{29}{60} + \frac{35}{3600} = .4930555$ Plus $50^{\circ} = 50.4930555$ 2. $50.4930555 \div 360 = .1402584$ 3. Multiply by πr^2 $3.14159 \times 94 \times 94$ Answer: $3893.4446748 = 3893.44 \text{ Sq. Ft.}$	60 29 35 50 360 3.14159 94	Note: Move Decimal Point Selector to position 7 STORE RECALL $\div$ RECALL REPEAT $\times$ $\div$ $+$ $+$ $\div$ $\times$ REPEAT $\times$ $\times$

INTERPOLATION

PROBLEM: Find the Tangent of $27^{\circ} 16' 38''$

ANALYSIS:

- (1) Tangent $27^{\circ} 16'$ = .51540
- (2) Tangent $27^{\circ} 17'$ = .51577
- (3) The difference = .00037
- (4) $.00037 \times \frac{38}{60}$ = .00023
- (5) Tangent $27^{\circ} 16' 38''$ = .51540
+ .00023
= .51563

SOLUTION				INDEX IN KEYBOARD		TOUCH CONTROL KEYS IN SEQUENCE		
1. Tangent 27° 16' – Tangent 27° 17' = .00037				.51540		Note: Move Decimal Point Selector to position 5 REPEAT		
2. .00037 × $\frac{38}{60}$ = .00023				.51577		–		
3. Tangent 27° 16' 38" = .51540 + .00023				38		×		
= .51563				60		÷ CHANGE SIGN *		
Table of Natural Tangents and Cotangents						+		
	24°		25°		26°		27°	
	Tang	Cotang	Tang	Cotang	Tang	Cotang	Tang	Cotang
0	.44523	2.24604	.46631	2.14451	.48773	2.05030	.50953	1.96261
1	.44558	2.24428	.46666	2.14288	.48809	2.04879	.50989	1.96120
2	.44593	2.24252	.46702	2.14125	.48845	2.04728	.51026	1.95979
3	.44627	2.24077	.46737	2.13963	.48881	2.04577	.51063	1.95838
4	.44662	2.23902	.46772	2.13801	.48917	2.04426	.51099	1.95698
5	.44697	2.23727	.46808	2.13639	.48953	2.04276	.51136	1.95557
6	.44732	2.23553	.46843	2.13477	.48989	2.04125	.51173	1.95417
7	.44767	2.23378	.46879	2.13316	.49026	2.03975	.51209	1.95277
8	.44802	2.23204	.46914	2.13154	.49062	2.03825	.51246	1.95137
9	.44837	2.23030	.46950	2.12993	.49098	2.03675	.51283	1.94997
10	.44872	2.22857	.46985	2.12832	.49134	2.03526	.51319	1.94858
11	.44907	2.22683	.47021	2.12671	.49170	2.03376	.51356	1.94718
12	.44942	2.22510	.47056	2.12511	.49206	2.03227	.51393	1.94579
13	.44977	2.22337	.47092	2.12350	.49242	2.03078	.51430	1.94440
14	.45012	2.22164	.47128	2.12190	.49278	2.02929	.51467	1.94301
15	.45047	2.21992	.47163	2.12030	.49315	2.02780	.51503	1.94162
16	.45082	2.21819	.47199	2.11871	.49351	2.02631	.51540	1.94023
17	.45117	2.21647	.47234	2.11711	.49387	2.02483	.51577	1.93885
18	.45152	2.21475	.47270	2.11552	.49423	2.02335	.51614	1.93746
19	.45187	2.21304	.47305	2.11392	.49459	2.02187	.51651	1.93608
20	.45222	2.21132	.47341	2.11233	.49495	2.02039	.51688	1.93470

*To eliminate the minus sign

EVALUATING AN INTEGRAL

PROBLEM: $\int_2^5 9x^3 - 4x^2 + 5x dx = 1266.75$

ANALYSIS: $\int_2^5 9x^3 dx - \int_2^5 4x^2 dx + \int_2^5 5x dx$

$$\left[\frac{9}{4} x^4 \right]_2^5 - \left[\frac{4}{3} x^3 \right]_2^5 + \left[\frac{5}{2} x^2 \right]_2^5$$

$$\frac{9}{4} (5^4 - 2^4) - \frac{4}{3} (5^3 - 2^3) + \frac{5}{2} (5^2 - 2^2)$$

$$1370.25 - 156 + 52.5 = 1266.75$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$5^2 = 25$ $5^4 = 625$ $2^2 = 4$ $5^4 - 2^4 = 609$ $609 \times \frac{9}{4} = 1370.25$	5 9 4	Note: Move Decimal Point Selector to position 5
$5^3 = 125$ $2^2 = 4$ $5^3 - 2^3 = 117$ $-(117 \times 4/3) = 1214.25$	 2 2 4 3	
$5^2 = 25$ $5^2 - 2^2 = 21$ $+ \left(21 \times \frac{5}{2} \right) = 1266.75$	 2 2	

EVALUATING A POLYNOMIAL

PROBLEM: $Y = 4X^4 + 5X^3 - 3X^2 + X - 1$

When $X = 9$

FIND: Y

METHOD NO. 1

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
		Note: Move Decimal Point Selector to position 5 5
$X^2 = 9^2 = 81$	9	STORE RECALL REPEAT ×
$X^4 = 9^4 = 6561$		REPEAT ×
$4X^4 = 4 \times 9^4 = 26,244$	4	×
$X^3 = 9^3 = 729$		RECALL REPEAT ×
		RECALL ×
$+ 5X^3 = + (5 \times 9^3) = 29,889$	5	× +
$X^2 = 9^2 = 81$		RECALL REPEAT ×
$- 3X^2 = - (3 \times 9^2) = 29,646$	3	× -
$+ X = 29,655$		RECALL +
$- 1 = 29,654$	1	-

EVALUATING A POLYNOMIAL

PROBLEM: $Y = 4X^4 + 5X^3 - 3X^2 + X - 1$

When $X = -9$

Find: Y

METHOD: $Y = \{[(4X + 5) X - 3] X + 1\} X - 1$

METHOD NO. 2

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
$X = -9$	9	<i>Note: Move Decimal Point Selector to position 5</i> CHANGE SIGN STORE RECALL
$4X = -36$	4	×
$4X + 5 = -31$	5	+
$(4X + 5) X = 279$		RECALL ×
$(4X + 5) X - 3 = 276$	3	-
$[(4X + 5) X - 3] X = -2484$		RECALL ×
$[(4X + 5) X - 3] X + 1 = -2483$	1	+
$\{[(4X + 5) X - 3] X + 1\} X = 22347$		RECALL ×
$\{[(4X + 5) X - 3] X + 1\} X - 1$	1	-
$Y = 22,346$		
Now try this problem:		
$Y = 25X^3 - 14X^2 - 18X + 38.$		
When $X = 7$, find Y . Answer (7801)		

DETERMINANTS

Solution of Simultaneous First Degree Equations

PROBLEM: $2X + 2Y + 3Z = 22$

$2X - 4Y + 3Z = 4$

$3X + 6Y - 2Z = 16$

FORMULA:

$$\begin{aligned} a_1x + b_1y + c_1z &= d_1 \\ a_2x + b_2y + c_2z &= d_2 \\ a_3x + b_3y + c_3z &= d_3 \end{aligned} \quad x = \frac{\begin{vmatrix} d_1 & b_1 & c_1 \\ d_2 & b_2 & c_2 \\ d_3 & b_3 & c_3 \end{vmatrix}}{\begin{vmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{vmatrix}}; \quad y = \frac{\begin{vmatrix} a_1 & d_1 & c_1 \\ a_2 & d_2 & c_2 \\ a_3 & d_3 & c_3 \end{vmatrix}}{\begin{vmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{vmatrix}}; \quad z = \frac{\begin{vmatrix} a_1 & b_1 & d_1 \\ a_2 & b_2 & d_2 \\ a_3 & b_3 & d_3 \end{vmatrix}}{\begin{vmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{vmatrix}}$$

SOLUTION:


$$X = \frac{\begin{array}{c} \text{Numerator} \\ \begin{array}{ccccccc} + & + & + & - & - & - \\ 22 & 2 & 3 & 22 & 2 & \\ 4 & -4 & 3 & 4 & -4 & \\ 16 & 6 & -2 & 16 & 6 & \end{array} \\ \hline \text{Denominator} \\ \begin{array}{ccccccc} 2 & 2 & 3 & 2 & 2 & \\ 2 & -4 & 3 & 2 & -4 & \\ 3 & 6 & -2 & 3 & 6 & \end{array} \end{array}}{\begin{array}{ccccccc} 176 & + & 96 & + & 72 & + & 192 & - & 396 & + & 16 \\ 16 & + & 18 & + & 36 & + & 36 & - & 36 & + & 8 \end{array}} = \frac{156}{78} = 2$$

$$Y = \frac{\begin{array}{ccc|cc} 2 & 22 & 3 & 2 & 22 \\ 2 & 4 & 3 & 2 & 4 \\ 3 & 16 & -2 & 3 & 16 \\ \hline 2 & 2 & 3 & 2 & 2 \\ 2 & -4 & 3 & 2 & -4 \\ 3 & 6 & -2 & 3 & 6 \end{array}}{\begin{array}{ccccccc} -16 & + & 198 & + & 96 & - & 36 & - & 96 & + & 88 \\ 78 \end{array}} = \frac{234}{78} = 3$$

$$Z = \frac{\begin{array}{ccc|cc} 2 & 2 & 22 & 2 & 2 \\ 2 & -4 & 4 & 2 & -4 \\ 3 & 6 & 16 & 3 & 6 \\ \hline 2 & 2 & 3 & 2 & 2 \\ 2 & -4 & 3 & 2 & -4 \\ 3 & 6 & -2 & 3 & 6 \end{array}}{\begin{array}{ccccccc} -128 & + & 24 & + & 264 & + & 264 & - & 48 & - & 64 \\ 78 \end{array}} = \frac{312}{78} = 4$$

DETERMINANTS

Note: Move Decimal Point Selector to position



PROCEDURE:

I. TO FIND NUMERATOR

1. Index 22 **ENTER**
2. Index 4 **CHANGE SIGN** ☐
3. Index 2 **CHANGE SIGN** ☐
4. Index 2 **ENTER**
5. Index 3 ☐
6. Index 16 ☐ **+**
7. Index 3 **ENTER**
8. Index 4 ☐
9. Index 6 ☐ **+**
10. Index 16 **ENTER**
11. Index 4 **CHANGE SIGN** ☐
12. Index 3 ☐ **-**
13. Index 6 **ENTER**
14. Index 3 ☐
15. Index 22 ☐ **-**
16. Index 2 **CHANGE SIGN**
17. Index 4 ☐
18. Index 2 ☐ **-**

II. TO FIND DENOMINATOR—FOLLOW SAME PROCEDURE AS IN I ABOVE

III. TO FIND VALUE OF X

1. Touch **REPEAT** **STORE**. The denominator is now stored in the Memory Unit for subsequent use when solving for Y. The numerator now appears in Register #2; the denominator appears in Register #1.
2. Touch **÷**. Value of X (2) appears in Register #1.

IV. TO FIND VALUE OF Y

1. Calculate the top half of the second determinant. This produces the numerator (234).
2. Touch **RECALL** and **÷**. This operation brings the denominator from the Memory Unit and divides it into the numerator. Then: $234 \div 78 = 3$. The value of Y (3) appears in Register #1.

V. TO DETERMINE VALUE OF Z

1. The value of Z can be determined by calculating the third determinant as in IV above.
2. However, since value of X and Y are now known the value of Z can be easily determined by substituting values of X and Y in any of the three equations. For example:

$$2X + 2Y + 3Z = 22$$

$$3Z = -2X - 2Y + 22$$


$$Z = \frac{-2X - 2Y + 22}{3}$$

$$= \frac{(-2 \times 2) - (2 \times 3) + 22}{3}$$

$$= \frac{-4 - 6 + 22}{3} = \frac{12}{3} = 4$$

COSINE LAW

PROBLEM: Given 3 sides find an angle.

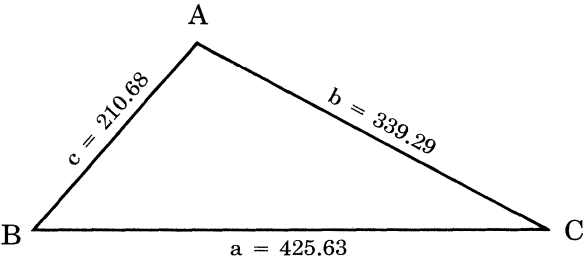

a = 425.63
b = 339.29
c = 210.68

REQUIRED: Cos C = .87213 Angle C = 29° 17' 34"

ANALYSIS: $\text{Cos } C = \frac{a^2 + b^2 - c^2}{2ab} = \frac{(425.63)^2 + (339.29)^2 - (210.68)^2}{2 \times 425.63 \times 339.29} = .87213$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
<u>TO FIND COSINE C</u> $(425.63)^2 = 181,160.8969$ $+ (339.29)^2 = 296,278.601$ $- (210.68)^2 = 251,892.5386$ $2 \times 425.63 = 851.26$ $\text{Cos } C = \frac{a^2 + b^2 - c^2}{2ab} = .87213$	425.63 339.29 210.68 2 425.63 339.29	<i>Note: Move Decimal Point Selector to position 5</i> REPEAT [X] REPEAT [X] [+] REPEAT [X] [-] ENTER [X] [X] [÷]
<u>TO FIND ANGLE C</u> (interpolate from Trig Tables: Cos 29° 17' = .87221; Cos 29° 18' = .87207) 87221 - 87207 = 14 87221 - 87213 = 8 8/14 × 60" = 34.28571 Therefore: ∠ C = 29° 17' 34"	87221 87207 87213 60 14	STORE RECALL [-] RECALL [-] [X] [÷]


COSINE LAW

PROBLEM: Given two sides and the included angle, find the third side.

FORMULA: $c^2 = a^2 + b^2 - 2ab \cos C$

EXAMPLE:

$$\begin{aligned} a &= 6.2 \\ b &= 8.3 \\ \angle C &= 56^\circ 45' 24'' \\ \cos C &= .54819 \end{aligned}$$

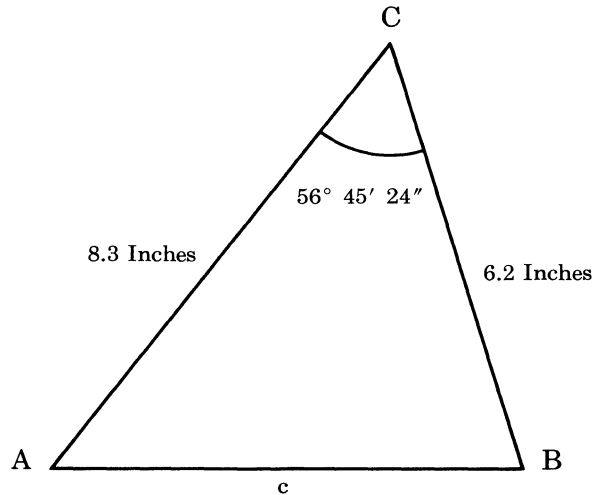

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
ANALYSIS: $c^2 = (6.2)^2 + (8.3)^2 - (2 \times 6.2 \times 8.3 \times .54819)$		<i>Note: Move Decimal Point Selector to position</i> 5
$a^2 = (6.2)^2 = 38.44$ $+b^2 = +(8.3)^2 = 107.33$ $2a = 12.4$ $2ab = 12.4 \times 8.3 = 102.92$ $-2ab \cos C = 102.92 \times .54819$ $a^2 + b^2 - 2ab \cos C = 50.91029$ Using the square root application on page 38, $c = \sqrt{50.91029} = 7.13514 = 7.135$	6.2 8.3 2 6.2 8.3 .54819	REPEAT × REPEAT × + ENTER × × × -

SQUARE ROOT

PROBLEM: Find the square root of 1738 to six significant digits.

FORMULA:

$$\sqrt{N} = \frac{\frac{N}{a} + a}{2}$$

Where: N = the radicand (1738)

a = an approximation of the square root of N

ANALYSIS: Mark off 1738 into couplets. Start at the decimal point and mark off to the left; e.g.

17 38. Determine the largest square in the left most couplet. The largest square in 17 is 16. The square root of 16 is 4. For each remaining couplet use a zero. The first approximation for $\sqrt{1738}$ is 40.

EXAMPLES: 1) 98.22 The largest square is 81. The square root of 81 is 9 with no additional couplets to the left of the decimal. The approximation is 9.

2) 6 62 41.33 The largest square in 6 is 4. The square root of 4 is 2 with two additional couplets to the left of the decimal point. The approximation is 200.

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
a N $\frac{N}{a} = 43.45000$ $\frac{N}{a} + a = 83.45000$ $\frac{\frac{N}{a} + a}{2} = 41.72500$ 41.725 is the second approximation of the square root of 1738. For closer values of $\sqrt{N}$, repeat the following sequence: STORE, REPEAT, RECALL, DIVIDE, RECALL, PLUS, 2, DIVIDE. Third approximation = 41.68934 Fourth approximation = 41.68932 PROOF: Touch REPEAT ×. Answer: 1737.99940 or 1738 rounded off.	40 1738 ⑦ 2	Note: Move Decimal Point Selector to position 5 ① STORE ② REPEAT ③ RECALL ④ ÷ ⑤ RECALL ⑥ + ⑧ ÷

SQUARE ROOT

PROBLEM: Find the square root of .0008317 to six significant digits.

METHOD:
$$\sqrt{N} = \frac{\frac{N}{a} + a}{2} \text{ Where:}$$

N = the radicand .0008317 and
a = an approximation of the square root of N

ANALYSIS: Mark off .0008317 into couplets starting from the decimal point .00 08 31 7. Again starting from the decimal point, for each couplet with only zeros set one zero in the approximation. For .00 08317 there is only one zero couplet so the approximation would be .0—. For the first

couplet with numbers other than zeros, determine the square root of the largest square in that number. The largest square in 08 or 8 is 4 and the square root of 4 is 2. The first approximation of .0008317 is .02.

EXAMPLES: 1) .08 31 7. There are no zero couplets and the square root of the largest square in 8 is 2. The approximation is .2.

2) .00 83 17. There is one zero couplet and the square root of the largest square in 83 is 9. The approximation is .09.

3) .00 00 00 45. There are three zero couplets and the square root of the largest square in 45 is 6. The approximation is .0006.

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
a N $\frac{N}{a} = .041585$ $\frac{N}{a} + a = .061585$ $\frac{N}{a} + a$ $\frac{a}{2} = .0307925$.0307925 is the second approximation of the square root of .0008317 For closer values of $\sqrt{N}$, repeat the following sequence: STORE, REPEAT, RECALL, DIVIDE, RECALL, PLUS, 2, DIVIDE. Third approximation = .0289011 Fourth approximation = .0288392 Fifth approximation = .0288392 PROOF: Touch REPEAT ×. Answer: .0008316	.02 .0008317 ⑦ 2	Note: Move Decimal Point Selector to position 7 ① STORE ② REPEAT ③ RECALL ④ ÷ ⑤ RECALL ⑥ + ⑧ ÷

CUBE ROOT

GENERAL

A convenient method of extracting cube root on the 130 Electronic Calculator lies in the application of the general formula:

$$\sqrt[r]{N} = \frac{1}{r} \left(\frac{N}{a^{r-1}} + (r-1)a \right)$$

In this formula, r represents the desired root of any number. a is the approximate root (r) of N . This formula can be used to extract any root of any positive number by using this one basic method.

For cube roots the formula becomes:

$$\sqrt[3]{N} = \frac{1}{3} \left(\frac{N}{a^2} + 2a \right)$$

" a ," in this formula, is the approximation of the root as determined from an abbreviated cube root table. (See the condensed cube root table printed below.)

PROCEDURE

The procedure consists of solving the formula once with the value of a taken from the table. Then the process is repeated using that answer as a closer approximation. For additional accuracy, use this cube root as a , and solve the formula again. A distinct advantage of this method lies in the fact that, even if an error is made during the

process, continued substitutions of the values found for a will correct the error and yield the desired root.

DECIMALS

When N has *more* than 4 digits to the left of the decimal, divide by 1,000 or 1,000,000 so that there will always be 2 to 4 digits to the left of the decimal. For example:

$$\frac{752,392}{1,000} = 752.392$$

Then after obtaining the cube root, multiply by the cube root of 1,000 (10) or 1,000,000 (100) to point off the cube root correctly.

$$\sqrt[3]{752,392} = 9.09525 \times 10 = 90.9525$$

When N has *less* than 2 digits to the left of the decimal, multiply by 1,000 or 1,000,000 so that there will always be 2 to 4 digits to the left of the decimal. For example:

$$.00752392 \times 1,000,000 = 7523.92$$

Then, after obtaining the cube root divide by 10 or 100 to point off the cube root correctly.

$$\sqrt[3]{.007\ 523\ 92} = \frac{19.595\ 12}{100} = .195\ 9512$$

CUBE ROOT TABLE


N	$\sqrt[3]{N}$	N	$\sqrt[3]{N}$	N	$\sqrt[3]{N}$	N	$\sqrt[3]{N}$
1	1	216	6	1 331	11	4 096	16
8	2	343	7	1 728	12	4 913	17
27	3	512	8	2 197	13	5 832	18
64	4	729	9	2 744	14	6 859	19
125	5	1 000	10	3 375	15	8 000	20

CUBE ROOT

PROBLEM: $\sqrt[3]{23,147.523}$

ANALYSIS: To adjust this problem to the machine, divide the radicand by 1,000. The extracted cube root will then be multiplied by 10. From the table, find the cube nearest 23 (27). Its root, 3, is used for the first value of a .

FORMULA: $\sqrt[3]{23,147.523} = 1/3 \left[\frac{23.147523}{3^2} + (2 \times 3) \right]$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
<u>2ND APPROXIMATION</u> $23.147523 \div (3)^2 = 2.5719470$ plus $(2 \times 3) = 8.5719470$ Divide by 3 = 2.8573156	3 23.147523 2 3	Note: Move Decimal Point Selector to position  STORE REPEAT RECALL REPEAT $\times$ $\div$ RECALL $\times$ $+$ $\div$
<u>3RD APPROXIMATION</u> Store 2.857 315 6 $23.147523 \div (2.857\ 315\ 6)^2$ = 2.835 228 7 Plus $(2 \times 2.857\ 315\ 6)$ Divide by 3 = 2.849 953 3	2 3	STORE REPEAT RECALL REPEAT $\times$ $\div$ RECALL $\times$ $+$ $\div$
4th approximation = 2.849 934 2 5th approximation = 2.849 934 2 THEN $10 \times 2.849\ 934\ 2 = 28.499\ 342 = \sqrt[3]{23,147.523}$		
PROOF: REPEAT REPEAT $\times$ $\times$ = 23,147.5215		

OVERCAPACITY PROBLEMS

PROBLEM: $\$98,765,432.10 \times .61857432091 = \$61,093,760.09$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
Index 1st Factor: 98,765,432.10 (Move Decimal Point Selector to position 13) Index 2nd Factor: .618 574 320 91 (Restore Decimal Point Selector to position 2) Read answer (\$61,093,760.09) at decimal position 2 in Register # 1 NOTE: The decimal position selected at the time the multiply key is depressed determines the decimal orientation of the product. Switching from 2 to 13 before entering the second term had the effect of dividing the first term by 10^{11}. Restoring the decimal program to position 2 has the effect of multiplying the product by 10^{11} to give the true answer.	98765432.10 .61857432091	Note: Move Decimal Point Selector to position 2 ENTER ×

DOUBLE PRECISION MULTIPLICATION


PROBLEMS:

1. 13 Digits by 13 Digits

$$5,847,637,290,816 \times 7,855,023,964,807 = 45,933,331,056,858,760,408,312,512$$

2. 10 Digits by 10 Digits

$$1,857,263,807 \times 1,187,524,396 = 2,205,546,080,620,335,572$$

SOLUTION	INDEX IN KEYBOARD	TOUCH CONTROL KEYS IN SEQUENCE
1. Index 1st Factor Index 2nd Factor 1st 13 Digits = 4 593 333 105 685 	5847637290816 7855023964807	Note: Move Decimal Point Selector to position  REPEAT STORE RECALL Change Decimal to 13 X
2nd 13 Digits = 8 760 408 312 512 		CLEAR ENTRY Change Decimal to 0 RECALL X (Depress OVERFLOW LOCK to release keyboard)
2. Index 1st Factor Index 2nd Factor 1st 13 Digits = 0 000 000 220 554 	1857263807 1187524396	Restore Decimal to 0 REPEAT STORE RECALL X Change Decimal to 13 (Write down answer)
2nd 13 Digits = 6 080 620 335 572 		CLEAR ENTRY Change Decimal to 0 RECALL X (Depress OVERFLOW LOCK to release keyboard)

Friden

CALCULATORS AND ADDING MACHINES FOR BUSINESS AND INDUSTRY

MODEL 130 (Electronic)	
	MODEL SVJ
MODEL SRQ	
	MODEL ACY

Complex problems are accomplished in seconds with the Friden Model 130 solid-state electronic desk calculator. It is noiseless, instantaneous, easy to use, and a pure delight to work with.

New vistas are open to the users of this amazing Friden calculator. Some of its outstanding features are: Shortcut Multiplication; Automatic Decimals for both multiplication and division; Instantaneous Back Transfer; Direct Tabulation; and Touch-one-key Automatic Squaring.

This is the only mechanical calculator in the world with automatic squaring plus automatic extraction of square root. In addition, it retains many of the other features of Friden fully automatic calculators.

Truly an adding/multiplying machine! Automatic step-over of multiplicand, plus repeat subtraction and back space feature, and the exclusive Visible Keyboard Check Dial make this an outstanding investment.

- The Product Applications Department at the Friden Educational Center, 31 Prince St., Rochester, N. Y., provides customers with new approaches to mathematical problems through the use of Friden fully automatic rotary and electronic calculating machines. These publications include: charts, booklets, manuals, and special applications.
- Charts have been compiled that provide short-cuts in figure handling for specific cases as well as general forms that occur in such industries as banking, insurance, and lumbering.
- Booklets have been published that provide machine methods for handling the major portion of mathematical computations that arise in various industries and fields of endeavor. Extensive material has been compiled in engineering and statistics.
- A complete listing of calculator applications and all other Friden literature may be obtained from Friden branch offices, located in all major cities, or by writing the Friden Educational Center, 31 Prince Street, Rochester 7, New York.

I N D E X

	Page		Page
Accumulation of Multipliers	13	Installment Loans	19, 20, 21
Accumulation of Products	13	Installment Mortgage Payments	21
Accumulative Division	7	Integrals, Evaluating	31
Accumulative Multiplication	6	Interest	18, 19
Accumulative Squaring	8	Interest Rate—Installment Loans	19
Actuarial Problems	7, 23, 24	Interpolation	30, 36
Addition	5	Invoicing	15
Addition of Quotients	7	Keyboard	2, 4
Algebraic Calculations	5, 9	Law of Exponents	12
Area of a Sector	29	Life Insurance	24
Calculating Algebraically	9	Memory Unit	11
Chain Multiplication	6	Minus Key	4
Change Sign Key	3	Multiplication	6
Clear All Key	4, 11	Multiplication Key	3
Clear Entry Key	3	Negative Division	7
Compound Interest	18	Negative Multiplication	6
Constant Dividend	11	Negative Squaring	8
Constant Divisor	11	Over Flow Lock	3
Constant Multiplier	11	Overcapacity Problems	42
Constants, Problems in	11, 14	Percent Increase or Decrease	17
Conversion of Denominate Numbers	28	Percent Mark-up	17
Cosine Law	36, 37	Percent Proration	16
Credit Balances	5	Percent Problems	17
Cube Root	40, 41	Plus Key	4
Decimal Interlock	3	Polynomials	32, 33
Decimal Point Key	4	Probability	22, 24
Decimal Point Selector	4	Proration	16
Denominate Numbers	28	Raising to a Power	12
Determinants	34, 35	Recall Key	4, 11
Display	1	Register Display	1
Division	7	Repeat Key	3, 14
Division Key	3	Sales Tax	15
Double Precision Multiplication	43	Sequential Operations	10
Enter Key	3	Simple Interest	18
Equal Monthly Payments	20	Square Root	38, 39
Evaluating an Integral	31	Squaring	8
Evaluation of a Polynomial	32, 33	Standard Deviation	26
Evaluation by Determinants	34, 35	Store Key	4, 11
Exponents	12	Subtraction	5
Geometric Series	25	Subtraction of Quotients	7
Individual/Accumulated Percentages	16	Volume of a Sphere	27

Friden, Inc.

SAN LEANDRO • CALIFORNIA

SALES AND SERVICE THROUGHOUT THE WORLD

A SUBSIDIARY OF THE SINGER COMPANY